



CAROLINA CARPORTS

187 Cardinal Ridge Trail, Dobson, NC 27017 • 1-800-670-4262

Quality Is Our First Priority

All colors are available with horizontal, vertical and lap siding panels.

COLOR CHART



HARLEY ORANGE

Limited Time Only!




KING BLUE



CARDINAL RED




TRUE BURGUNDY




WHITE




CLAY




BLACK

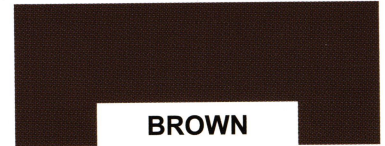

BROWN



TAN

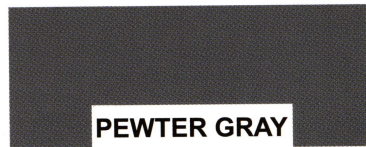

PEWTER GRAY




SANDSTONE



BARN RED




BEIGE

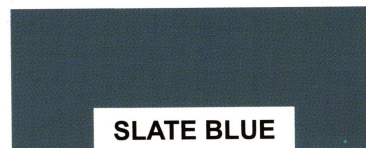

SLATE BLUE



EVERGREEN

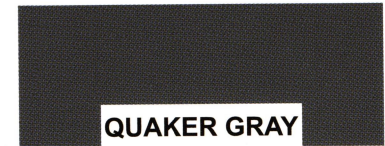

QUAKER GRAY



VINT. BURGUNDY

PLEASE NOTE THAT COLORS MAY VARY DUE TO THE PRINTING PROCESS



Custom Made For CCI Mustang - 850HP By Petty Garage



Custom Made For CCI Dodge Challenger - 1000HP By Petty Garage

For a Carolina Carports Representative near you call 1-800-670-4262 or visit www.carolinacarports.com for more information.

QUALITY IS OUR FIRST PRIORITY!


Standard Buildings
12' to 24'





All Certified Triples 26' to 30' Wide



Barns 12' to 84' Wide
Horse - Carolina - Seneca

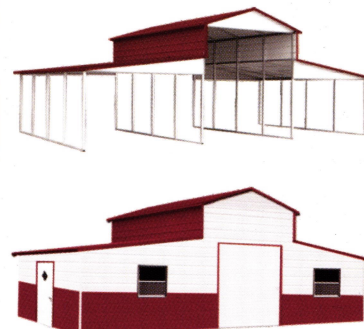

All Certified 32' and 60' Wide

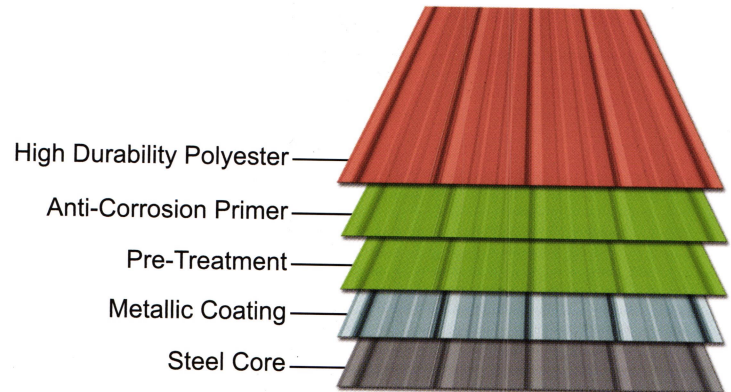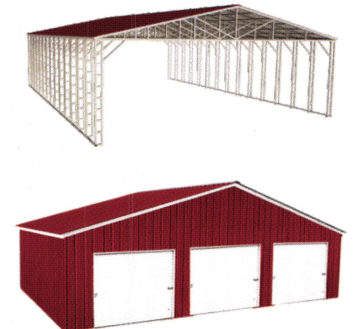

PERFORMANCE CHARACTERISTICS

| SPECIFICATION | TEST | RESULTS |
|-----------------------|---|--|
| ASTM D-523 | 60° Specular Gloss | 10-80 Gardner 60° meter or equivalent |
| ASTM D-3363 | Pencil Hardness | H-2H No break in the film |
| ASTM D-4145 | Coating Flexibility | 1-T to 2-T No pick off with scotch #610 tape |
| ASTM D-2794 | Reverse Impact 60-80 Inch Pounds | Passes No pick off with scotch #610 tape |
| ASTM G-53 | Q.U.V. Weatherometer 1000 Hours | Passes No objectionable chalking per ASTM D-659, color change per ASTM D-2244 or blistering per ASTM D-714 |
| ASTM D-2247 | Humidity, 1000 Hours at 100°F and 100% Humidity | Passes Less than 5% No. 8 blisters |
| ASTM B-117 | Salt Spray 1000 Hours 5% Salt Solution | Passes Less than 5% No. 8 blisters and less than 1/8" creep or tape off from the scribe per ASTM D-1654 |
| ASTM D-2244-89 | 45° So. Florida exposure 20 years color retention | Passes No objectionable color change |
| ASTM D-659-86 | 45° So. Florida exposure 20 years chalk resistance | Passes No objectionable gloss loss or chalking |
| EMMAQUA | Accelerated Weathering 2,000,000 Langleys, Sun 10 Arizona | Passes No objectionable gloss loss, chalking, color change or blistering |

High Durability Polyester Premium Coil Coating

Providing excellent long term gloss retention and corrosion protection in severe environments. Formulated with a propriety high durability polyester resin for resistance to chalking and fading and contains high quality exterior grade pigmentation to provide superior color stability.

Coatings feature our special stain resistant resin that improves scratch and metal marking resistance. These coatings are tough yet flexible enough to be embossed and easily take a 1-T bend in roll forming.

A durability coating system designed to be applied as a two coat primer / finish system. Primer should be used to provide exceptional corrosion protection. Our backer competes the system and provides excellent "wet stack" corrosion protection and its internal lubricants assist roll forming.